

Name _____

Date _____

Track / City _____

Event _____

Front Suspension



Upper Spacer: _____ mm

Front Tower:

- ☐ Std
☐ JT Tower

Toe: ☐ In ☐ Out _____°

Tie Rod: _____

Front Bulkhead


Weight Placement: * 1oz=28g

- ☐ None
☐ Bulkhead Inside _____ oz _____ g
☐ On the skid plate _____ oz _____ g



4.8mm Ball Stud:

- ☐ UM128 (Std.)
☐ UMW508 (+2mm High Mount)



Caster:

- ☐ 25°
☐ 30°

Camber: _____°

4.8mm Ball Stud Spacer: _____ mm

AL. Steering Support:

- ☐ None
☐ UMW724

Axle Spacer:

- ☐ Out _____ mm
☐ In _____ mm

Wheel Hub:

- ☐ UM569 / Std
☐ UM506

Caster Block:

- ☐ 0°
☐ 2°
☐ 4°

Caster Block Position:

- ☐ IN (wide/Std)
☐ OUT (Narrow)

4.8mm Ball Stud:

- ☐ LA246 (-1mm Low Mount)
☐ 97050M (Std)


Ackerman Steer Spacer: _____ mm

Axle Height Spacer: _____ mm

Bump Steer Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension

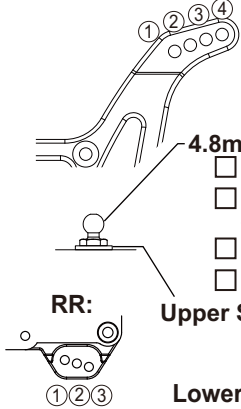

4.8mm Ball Stud:

- ☐ UM129
☐ UMW508 (+2mm High Mount)
☐ 97050M
☐ UM128 (Std.)

Upper Spacer: _____ mm


Lower Sus. Holder:

- Normal
Narrow ☐ RF Wide ☐ RF2
Option
☐ UMW511GM (RF/Alu)

Sus Holder Spacer:

- F ☐ 0.5 ☐ 1.0 ☐ None
R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____°



Universal Swing Shaft:

Camber: _____°

Upper Spacer: _____ mm

Wheelbase:

F: _____ mm
R: _____ mm

Sway Bar: ☐ None

☐ _____ mm

Drive Hub :

- ☐ 4mm (TFW113)
☐ 4.5mm (LAW30GM/Std.)
☐ 5.2mm (UMW523)

Axle Spacer:

- ☐ Out _____ mm
☐ In _____ mm

Rear Hub Carrier :

- ☐ 0°Type-B (UM519)
☐ 0°Type-B2 (UM519-2)
☐ 0° Alu (UMW704-0)
☐ 0.5°Alu (UMW704-05)
☐ 1°Alu (UMW704-1)

Shock

Front

Rear

Piston: _____

Oil: # _____

Spring: _____

Limiters: in out mm in out mm


Length(A): _____ mm

O-ring: _____

Shock Top type: ☐ Alu(UM719/Std) ☐ UM753-1

Ball End type: Front: ☐ S ☐ M ☐ L


Rear: ☐ S ☐ M ☐ L



Battery Placement:

- ☐ UM787 ☐ None ☒ Screw

Comment:



Foam:

- ☐ Front
☐ Rear
☐ None

Battery Type

- ☐ Straight
☐ Separate
☐ Short
☐ Sideways

Type: _____

Other

Motor: _____


ESC: _____

Pinion/Spur: _____

Chassis

☐ Kit

☐ UMW720 (LW)

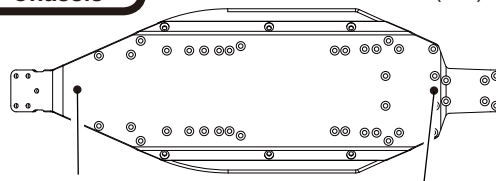

F _____ mm Ride Height: R _____ mm

Tire

Front

Rear

Traction Compound or comment:

Tire:

Inserts:

Wheel:

Comment

Track Condition

- ☐ Smooth
☐ Bumpy
☐ Low Truction
☐ Med. Truction
☐ Higt Truction
☐ Wet
☐ Dry

- ☐ Sandy
☐ Soft Dirt
☐ Grass
☐ Blue Groore
☐ Clay
☐ Dusty
☐ Astroturf
☐ _____

Wing

Wing Mount :

- ☐ Blast-S
☐ Blast-L
☐ Step-S
☐ Step-M
☐ Step-L
☐ Step 2.0
☐ Step 3.0
☐ Straight
☐ Round

☐ Narrow
☐ Wide

Wing Angle :

- ☐ 4°
☐ 7°
☐ 10°

Lip :