

Name _____


Date _____

Track / City _____

Event _____

Front Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☐ Carbon (LAW58)
☐ Other _____

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:




4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129

Upper Spacer: _____ mm

Camber _____°

Spacer: _____ mm




Shock Position:

Wheelbase: Front _____ mm

Rear _____ mm

Bump Steer Spacer: _____ mm



Toe:

- ☐ In
☐ Out _____°

Sway Bar:

- ☐ None
☐ _____ mm

Ackerman Spacer: _____ mm




Front Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Rear Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☐ Carbon (LAW59)
☐ Other _____

Wing Stay Position:

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129


Upper Spacer: _____ mm

Toe In: _____°

Sus. Arm:

- ☐ LA272(Std)
☐ UM713B

Camber _____°



Wheelbase:


Front _____ mm

Rear _____ mm

Stiffener:

- ☐ Std.
☐ Carbon Comp. (LAW53)


Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: _____ mm



- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)

Sway Bar:

- ☐ None
☐ _____ mm

Center Plate:

- ☐ Std.
☐ Aluminum (LAW55)

Rear Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil:

Shock Spring:

Limiters:


in out mm mm

in out mm mm


Shock Length (A): _____ mm

Shock Top Type: ☐ Alu. (UM719/Std) ☐ UM753-1

5.8mm Ball End:

Front: ☐ S ☐ M ☐ LRear: ☐ S ☐ M ☐ L

Chassis:

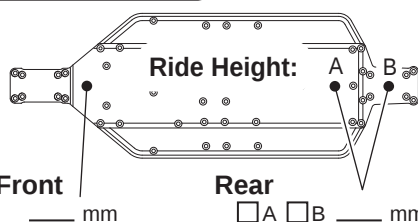

Front _____ mm

Rear _____ mm

☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire:

Compound:

Inserts:

Wheel:

Note:

Electronics:

- Battery:** ☐ Saddle Pack
☐ Short

Motor Position:

☐ Front☐ Rear

Servo Mounting:

☐ Straight☐ Sideways☐ Aluminum (LAW56)

Motor Mount Position:

☐ Std ☐ 8mm Front

Battery Position:

☐ Std ☐ 8mm Front

Motor:

Pinion / Spur: _____

ESC: _____

Body / Wing:

Body:

Wing Mount:

☐ Narrow ☐ Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

☐ 4° ☐ 7° ☐ 10°

Lip Height:

_____ mm

Material:

Screw: ☐ Steel ☐ Titanium

Pinion Gear:

☐ Steel ☐ Aluminum

Shock O-Ring:

☐ O-ring ☐ X-ring ☐ Red ☐ Clear

Track Condition

- ☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Traction ☐ Grass
☐ Med. Traction ☐ Blue Groove
☐ Higt Traction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☐ _____